

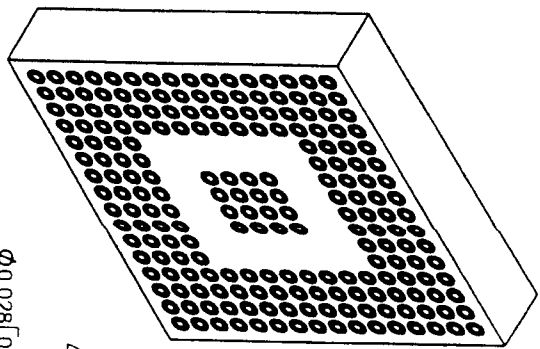


REV	DESCRIPTION OF CHANGES	ECO #	REL. DATE
A	INITIAL RELEASE	0391	11/30/05

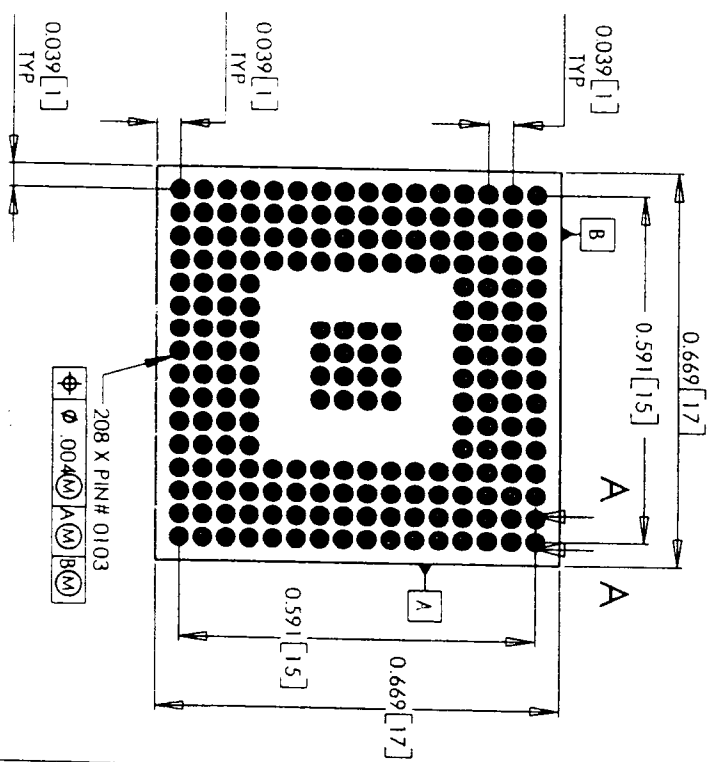

SECTION A-A
SCALE 20:1

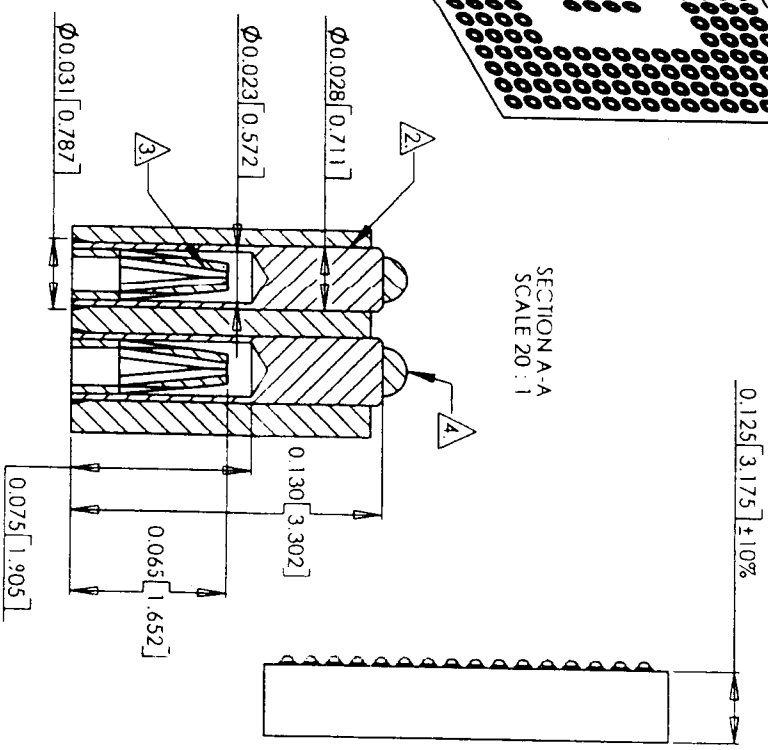

- 4. SOLDERBALL: 208 X Ø.020 EUTECTIC, Sn 96.5/Ag 3/Cu .5, LEAD FREE COMPLIANT PER ROHS, 220°C
- 3. CLIP: P/N 0048, BeCu ALLOY C17200 PER ASTM-B196, PLATING 30UIN MIN. OVER NICKEL 50UIN MIN.
- 2. PIN: P/N 0103, BRASS ALLOY C36000 PER ASTM-B16, PLATING 10UIN MIN. OVER NICKEL 100UIN MIN.
- 1. MATERIAL: FR-4 PER IPC 4101/24, COLOR NATURAL, THICKNESS .125±10%

NOTES: UNLESS OTHERWISE SPECIFIED

THIRD ANGLE PROJECTION	
	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES (MM)
STANDARD TOLERANCES	ANGLE
.XX .XXX .XXX .XXX	F
+ .010 .005 .005 .005	Z
MATERIAL SPECIFICATION	
[FR-4]	IPC 4101/24

THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND IS THE PROPERTY OF DANAMON, INCORPORATED. IT MAY NOT BE REPRODUCED, TRANSMITTED OR OTHERWISE DISCLOSED TO ANY OTHER PARTY WITHOUT WRITTEN CONSENT FROM DANAMON, INCORPORATED.	
DRAWN	R. CARDO GARCIA
CHECKED	J. JENNIS JOHNSON
DATE	11/26/05
DATE	11/26/05
DATE	11/30/05
DATE	11/30/05
DATE	11/30/05
DATE	11/30/05

danamon.com

TITLE: 208 1mm BASE

SIZE: B

PART No.: 000-4078-00

REV: A

PLLOT SCALE: 5:1

DWG SCALE: 1:1

AUTOCAD FILE: 1000-208F-0103-01A1-A